arXiv:0808.2958v2 [hep-ph] 19 Sep 2008

Series expansion of the photon self-energy in QED and the photon anomalous magnetic moment

H. Pérez Rojas[†] and E. Rodriguez Querts[‡]
Instituto de Cibernetica, Matematica y Fisica,
Calle E 309, Vedado, Ciudad Habana, Cuba.
[†] *hugo@icmf.inf.cu,* [‡] *elizabeth@icmf.inf.cu*

We start from the analytical expression of the eigenvalues $\kappa^{(i)}$ of the photon self-energy tensor in an external constant magnetic field B calculated by Batalin Shabad in the Furry representation, and in the one-loop approximation. We expand in power series of the external field and in terms of the squared photon transverse momentum z_2 and (minus) transverse energy $z_1 = k^2 - z_2$, in terms of which are expressed $\kappa^{(i)}$. A general expression is given for the photon anomalous magnetic moment $\mu_\gamma > 0$ in the region of transparency, below the first threshold for pair creation, and it is shown that it is positive, i.e. paramagnetic. The results of the numerical calculation for $\mu_\gamma > 0$ are displayed in a region close to the threshold.

PACS numbers: 12.20.-m, 12.20.Ds, 13.40.Em, 14.70.Bh.
Keywords: Magnetic Moment, Photons

This paper is to be understood as a complement of the shorter paper [1]. Here calculations of several quantities appearing in it are made in more detail. We start from the renormalized eigenvalues of the polarization operator in presence of a constant homogeneous magnetic field in one-loop approximation, given by Shabad in [2]:

I. POLARIZATION OPERATOR

$$\kappa_i = \frac{e^2}{2\pi^2}\int_0^\infty d\tau \int_{-1}^{1} d\eta e^{-m^2\tau}\left[\rho_i \frac{eB}{\sinh(eB\tau)} e^{-z_2\frac{\sinh(eB[(1+\eta)/2]\tau)\sinh(eB[(1-\eta)/2]\tau)}{eB\sinh(eB\tau)} - z_1\frac{1-\eta^2}{4}\tau} + (z_1+z_2)\frac{1-\eta^2}{8\tau}\right], \qquad (1)$$

where we have

$$\begin{aligned}
\rho_1 &= -\frac{z_1+z_2}{2}\frac{\sinh(eB[(1+\eta)/2]\tau)\cosh(eB[(1+\eta)/2]\tau)}{\sinh(eB\tau)}\frac{1-\eta}{2}, \\
\rho_2 &= -\frac{z_1}{2}\cosh(eB\tau)\frac{1-\eta^2}{4} - \frac{z_2}{2}\frac{\sinh(eB[(1+\eta)/2]\tau)\cosh(eB[(1+\eta)/2]\tau)}{\sinh(eB\tau)}\frac{1-\eta}{2}, \\
\rho_3 &= -\frac{z_2}{2}\frac{\sinh(eB[(1+\eta)/2]\tau)\sinh(eB[(1-\eta)/2]\tau)}{\sinh^2(eB\tau)} - \frac{z_1}{2}\frac{\sinh(eB[(1+\eta)/2]\tau)\cosh(eB[(1+\eta)/2]\tau)}{\sinh(eB\tau)}\frac{1-\eta}{2},
\end{aligned}$$

where $z_1 = k_\parallel^2 - k_0^2$ and $z_2 = k_\perp^2$
After introducing the new variable $t = eB\tau$, previous expressions look like

$$\kappa_i = \frac{e^2}{2\pi^2}\int_0^\infty dt \int_{-1}^{1} d\eta e^{-\frac{m^2}{eB}t}\left[\frac{\rho_i}{\sinh t}e^{\zeta} + (z_1+z_2)\frac{1-\eta^2}{8t}\right], \qquad (2)$$

$$\begin{aligned}
\zeta &= -\frac{z_2}{eB}\frac{\sinh([(1+\eta)/2]t)\sinh([(1-\eta)/2]t)}{\sinh t} - \frac{z_1}{eB}\frac{1-\eta^2}{4}t \\
\rho_1 &= -\frac{z_1+z_2}{2}\frac{\sinh([(1+\eta)/2]t)\cosh([(1+\eta)/2]t)}{\sinh t}\frac{1-\eta}{2} \\
\rho_2 &= -\frac{z_1}{2}\cosh t\frac{1-\eta^2}{4} - \frac{z_2}{2}\frac{\sinh([(1+\eta)/2]t)\cosh([(1+\eta)/2]t)}{\sinh t}\frac{1-\eta}{2} \\
\rho_3 &= -\frac{z_2}{2}\frac{\sinh([(1+\eta)/2]t)\sinh([(1-\eta)/2]t)}{\sinh^2 t} - \frac{z_1}{2}\frac{\sinh([(1+\eta)/2]t)\cosh([(1+\eta)/2]t)}{\sinh t}\frac{1-\eta}{2}
\end{aligned}$$

A. Small frequencies limit $z_1, z_2 << m^2$

We are interested in a wide range of frequencies characterized by the condition $z_1, z_2 << m^2$. We can express (2) as

$$\kappa_i = \frac{e^2}{2\pi^2}\int_0^\infty dt \int_{-1}^1 d\eta e^{-\frac{m^2}{eB}t}\left[\frac{\rho_i}{\sinh t}\sum_{l=0}^{\infty}\frac{\zeta^l}{l!} + (z_1+z_2)\frac{1-\eta^2}{8t}\right], \tag{3}$$

or

$$\kappa_i = \sum_{l=0}^{\infty}\kappa_i^{(l)}, \tag{4}$$

$$\begin{aligned}
\kappa_i^{(0)} &= \frac{e^2}{2\pi^2}\int_0^\infty dt \int_{-1}^1 d\eta e^{-\frac{m^2}{eB}t}\left[\frac{\rho_i}{\sinh t} + (z_1+z_2)\frac{1-\eta^2}{8t}\right], \\
\kappa_i^{(l)} &= \frac{e^2}{2\pi^2}\frac{1}{l!}\int_0^\infty dt \int_{-1}^1 d\eta e^{-\frac{m^2}{eB}t}\frac{\rho_i}{\sinh t}\zeta^l, \qquad l = 1,2,3,...,
\end{aligned}$$

and consider the first few terms of $\kappa_i^{(l)}$ in the series expansion (4). Here we will explicitly compute $\kappa_i^{(0)}$ and $\kappa_i^{(1)}$.

To get the linear term of κ_i in z_1, z_2 (which for $z_1 = z_2$ will be used as the infrared limit), we take $e^{\zeta=1}$, and from ρ_i we have, by naming it as $\kappa_i^{(0)}$,

$$\kappa_1^{(0)} = (z_1+z_2)\frac{e^2}{2\pi^2}\int_0^\infty dt \int_{-1}^1 d\eta e^{-\frac{m^2}{eB}t}\left[\frac{1+\eta}{2t} - \frac{\sinh([(1+\eta)/2]t)\cosh([(1+\eta)/2]t)}{\sinh^2 t}\right]\frac{1-\eta}{4} \tag{5}$$

$$\begin{aligned}
\kappa_2^{(0)} &= z_1\frac{e^2}{2\pi^2}\int_0^\infty dt \int_{-1}^1 d\eta e^{-\frac{m^2}{eB}t}\left[\frac{1}{t} - \frac{\cosh t}{\sinh t}\right]\frac{1-\eta^2}{8} + \\
&\quad + z_2\frac{e^2}{2\pi^2}\int_0^\infty dt \int_{-1}^1 d\eta e^{-\frac{m^2}{eB}t}\left[\frac{1+\eta}{2t} - \frac{\sinh([(1+\eta)/2]t)\cosh([(1+\eta)/2]t)}{\sinh^2 t}\right]\frac{1-\eta}{4},
\end{aligned} \tag{6}$$

$$\begin{aligned}
\kappa_3^{(0)} &= z_1\frac{e^2}{2\pi^2}\int_0^\infty dt \int_{-1}^1 d\eta e^{-\frac{m^2}{eB}t}\frac{1-\eta}{4}\left[\frac{1+\eta}{2t} - \frac{\sinh([(1+\eta)/2]t)\cosh([(1+\eta)/2]t)}{\sinh^2 t}\right] + \\
&\quad + z_2\frac{e^2}{2\pi^2}\int_0^\infty dt \int_{-1}^1 d\eta e^{-\frac{m^2}{eB}t}\frac{1}{2}\left[\frac{1-\eta^2}{4t} - \frac{\sinh([1+\eta)/2]t)\sinh([1-\eta)/2]t)}{\sinh^3 t}\right],
\end{aligned} \tag{7}$$

After integrating in η we get

$$\kappa_i^{(0)} = z_1\frac{e^2}{2\pi^2}\int_0^\infty dt e^{-\frac{m^2}{eB}t}g_{i1} + z_2\frac{e^2}{2\pi^2}\int_0^\infty dt e^{-\frac{m^2}{eB}t}g_{i2} \qquad i = 1,2,3 \tag{8}$$

$$\begin{aligned}
g_{11} &= g_{12} = g_{22} = g_{31} = -\frac{1}{12\,t} - \frac{\coth t}{4\,t^2} + \frac{\coth^2 t}{4\,t} > 0, \\
g_{21} &= \frac{1}{6t} - \frac{\cosh t}{6\sinh t} < 0, \\
g_{32} &= \frac{1}{6t} + \frac{1}{2t\sinh^2 t} - \frac{\cosh t}{2\sinh^3 t} > 0.
\end{aligned}$$

Now we are interested in the next order quadratic on z_1, z_2. Let us call this term $\kappa_i^{(1)}$. This term in (4) is

$$\kappa_1^{(1)} = \frac{e^2}{4\pi^2 eB}\int_0^\infty dt e^{-\frac{m^2}{eB}t}\left(z_1^2 j_{11} + z_1 z_2 j_{12} + z_2^2 j_{22}\right), \tag{9}$$

$$\kappa_2^{(1)} = \frac{e^2}{4\pi^2 eB}\int_0^\infty dt e^{-\frac{m^2}{eB}t}\left(z_1^2 h_{11} + z_1 z_2 h_{12} + z_2^2 h_{22}\right), \tag{10}$$

$$\kappa_3^{(1)} = \frac{e^2}{4\pi^2 eB}\int_0^\infty dt e^{-\frac{m^2}{eB}t}\left(z_1^2 f_{11} + z_1 z_2 f_{12} + z_2^2 f_{22}\right), \tag{11}$$

where

$$\begin{aligned}
j_{11} &= \int_{-1}^{1} d\eta \frac{(1-\eta)(1-\eta^2)}{8} t \frac{\sinh([(1+\eta)/2]t)\cosh([(1+\eta)/2]t)}{\sinh^2 t} \\
&= -\frac{1}{4\,(t)^2} - \frac{3\ \coth t}{4\,(t)^3} + \frac{3\coth^2 t}{4\,(t)^2}, \\
j_{12} &= \int_{-1}^{1} d\eta \frac{\sinh([(1+\eta)/2]t)\cosh([(1+\eta)/2]t)}{\sinh^2 t} \frac{(1-\eta)}{2} \left(\frac{\sinh([(1+\eta)/2]t)\sinh([(1-\eta)/2]t)}{\sinh t} + \frac{1-\eta^2}{4} t \right) \\
&= -\frac{1}{8\sinh^2 t} + \frac{19}{32(t)^2\sinh^2 t} + \frac{11\cosh 2\tau'}{32(\tau')^2\sinh^2 t} - \frac{3\coth t}{16t\sinh^2 t} - \frac{3\sinh 2t}{8(t)^3\sinh^2 t} \\
j_{22} &= \int_{-1}^{1} d\eta \frac{\sinh^2([(1+\eta)/2]\tau')\sinh([(1-\eta)/2]t)\cosh([(1+\eta)/2]t)}{\sinh^3 t} \frac{(1-\eta)}{2} \\
&= \frac{3\coth^2 t}{16(t)^2} - \frac{1}{8\sinh^2 t} - \frac{3\coth t}{16t\sinh^2 t} \\
h_{11} &= \int_{-1}^{1} d\eta \frac{(1-\eta^2)^2}{16} t\coth t, \\
&= \frac{t}{15}\coth t \\
h_{12} &= \int_{-1}^{1} d\eta \frac{1-\eta^2}{4} \frac{\sinh([(1+\eta)/2]t)}{\sinh^2 t} \left(\sinh([(1-\eta)/2]t)\cosh t + \cosh([(1+\eta)/2]t) \frac{1-\eta}{2} t \right), \\
&= \frac{1}{12} \left(2 - \frac{3\coth t}{(t)^3} + \left(2 + \frac{3}{(t)^2} \right) \frac{1}{\sinh^2 t} \right) \\
h_{22} &= \int_{-1}^{1} d\eta \frac{1-\eta}{2} \frac{\sinh^2([(1+\eta)/2]t)\sinh([(1-\eta)/2]t)\cosh([(1+\eta)/2]t)}{\sinh^3 t}, \\
&= \frac{1}{16(t)^2} \left(3\coth^2 t - t\,(2t + 3\coth t) \frac{1}{\sinh^2 t} \right) \\
f_{11} &= \int_{-1}^{1} d\eta \frac{(1-\eta^2)(1-\eta)}{8} \frac{\sinh([(1+\eta)/2]t)\cosh([(1+\eta)/2]t)}{\sinh^2 t} t, \\
&= -\frac{1}{4(t)^3} \left(t + 3\coth t - 3t\coth^2 t \right) \\
f_{12} &= \int_{-1}^{1} d\eta \frac{1-\eta}{2} \frac{\sinh([(1+\eta)/2]t)\sinh([(1-\eta)/2]t)}{\sinh^3 t} \left(\sinh([(1+\eta)/2]t)\cosh([(1+\eta)/2]t) + \frac{1+\eta}{2} t \right), \\
&= \frac{1}{48(t)^2} \left(9 + \left(33 - 6(t)^2 + \tau'(-33 + 8(t)^2)\coth t \right) \frac{1}{\sinh^2 t} \right) \\
f_{22} &= \int_{-1}^{1} d\eta \frac{\sinh^2([(1+\eta)/2]t)\sinh^2([(1-\eta)/2]t)}{\sinh^4 t} \\
&= \frac{1}{8\sinh^4(t)} \left(4 + 2\cosh(2t) - \frac{3}{t}\sinh(2t) \right)
\end{aligned}$$

B. Small fields limit $eB << m^2$

For fields $eB << m^2$ (actually it is enough that $\frac{eB}{m^2} \lesssim 10^{-1}$) the functions inside the integrals in $\kappa_i^{(0),(1)}$ are significantly different from zero only for $t << 1$ and we can expand the following expressions around $t = 0$ and retain the first few terms:

$$g_{11} \approx \frac{t}{45} - \frac{t^3}{315} + \frac{2\,t^5}{4725} - \frac{t^7}{18711}, \tag{12}$$

$$g_{21} \approx \frac{1}{6} \left(-\frac{t}{3} + \frac{t^3}{45} - \frac{2t^5}{945} + \frac{t^7}{4725} \right), \tag{13}$$

$$g_{32} \;\approx\; \frac{t}{15}-\frac{t^3}{63}+\frac{2t^5}{675}-\frac{t^7}{2079}, \tag{14}$$

and

$$\begin{aligned}
j_{11} &\approx \frac{1}{15}-\frac{t^2}{105}+\frac{2\,t^4}{1575}-\frac{t^6}{6237}+\frac{1382\,t^8}{70945875}, && (15)\\
j_{12} &\approx \frac{2}{15}-\frac{t^2}{42}+\frac{t^4}{270}-\frac{82\,t^6}{155925}+\frac{907\,t^8}{12899250}, && (16)\\
j_{22} &\approx \frac{1}{15}-\frac{t^2}{70}+\frac{23\,t^4}{9450}-\frac{19\,t^6}{51975}+\frac{7213\,t^8}{141891750}, && (17)\\
h_{11} &\approx \frac{1}{15}\left(1+\frac{t^2}{3}-\frac{t^4}{45}+\frac{2t^6}{945}-\frac{t^8}{4725}\right), && (18)\\
h_{12} &\approx \frac{2}{15}+\frac{t^2}{126}-\frac{19t^4}{14175}+\frac{181t^6}{935550}-\frac{5443t^8}{212837625}, && (19)\\
h_{22} &\approx \frac{1}{15}-\frac{t^2}{70}+\frac{23t^4}{9450}-\frac{19t^6}{51975}+\frac{7213t^8}{141891750}, && (20)\\
f_{11} &\approx \frac{1}{15}-\frac{t^2}{105}+\frac{2t^4}{1575}-\frac{t^6}{6237}+\frac{1382t^8}{70945875}, && (21)\\
f_{12} &\approx \frac{2}{15}-\frac{13t^2}{315}+\frac{253t^4}{28350}-\frac{t^6}{630}-\frac{106643t^8}{425675250}, && (22)\\
f_{22} &\approx \frac{1}{15}-\frac{2t^2}{63}+\frac{2t^4}{225}-\frac{4t^6}{2079}+\frac{1382t^8}{3869775}. && (23)
\end{aligned}$$

Finally, using (12)-(23) we easily get

$$\begin{aligned}
\kappa_1^{(0)} &= \frac{e^2}{2\pi^2}(z_1+z_2)\left(\frac{1}{45}\left(\frac{eB}{m^2}\right)^2-\frac{2}{105}\left(\frac{eB}{m^2}\right)^4+\frac{16}{315}\left(\frac{eB}{m^2}\right)^6-\frac{80}{297}\left(\frac{eB}{m^2}\right)^8+...\right)\\
\kappa_2^{(0)} &= \frac{e^2}{2\pi^2}\left[\frac{z_1}{6}\left(-\frac{1}{3}\left(\frac{eB}{m^2}\right)^2+\frac{2}{15}\left(\frac{eB}{m^2}\right)^4-\frac{16}{63}\left(\frac{eB}{m^2}\right)^6+\frac{16}{15}\left(\frac{eB}{m^2}\right)^8+...\right)+\right. && (24)\\
&\left.\qquad +z_2\left(\frac{1}{45}\left(\frac{eB}{m^2}\right)^2-\frac{2}{105}\left(\frac{eB}{m^2}\right)^4+\frac{16}{315}\left(\frac{eB}{m^2}\right)^6-\frac{80}{297}\left(\frac{eB}{m^2}\right)^8+...\right)\right], && (25)
\end{aligned}$$

$$\begin{aligned}
\kappa_3^{(0)} &= \frac{e^2}{2\pi^2}\left[z_1\left(\frac{1}{45}\left(\frac{eB}{m^2}\right)^2-\frac{2}{105}\left(\frac{eB}{m^2}\right)^4+\frac{16}{315}\left(\frac{eB}{m^2}\right)^6-\frac{80}{297}\left(\frac{eB}{m^2}\right)^8+...\right)+\right.\\
&\left.\qquad +z_2\left(\frac{1}{15}\left(\frac{eB}{m^2}\right)^2-\frac{2}{21}\left(\frac{eB}{m^2}\right)^4+\frac{16}{45}\left(\frac{eB}{m^2}\right)^6-\frac{80}{33}\left(\frac{eB}{m^2}\right)^8+...\right)\right]. && (26)
\end{aligned}$$

and

$$\begin{aligned}
\kappa_1^{(1)} &= \frac{e^2}{4\pi^2 m^2}\left[z_1^2\left(\frac{1}{15}-\frac{2}{105}\left(\frac{eB}{m^2}\right)^2+\frac{16}{525}\left(\frac{eB}{m^2}\right)^4-\frac{80}{693}\left(\frac{eB}{m^2}\right)^6+\frac{176896}{225225}\left(\frac{eB}{m^2}\right)^8+...\right)+\right.\\
&\qquad +z_1 z_2\left(\frac{2}{15}-\frac{1}{21}\left(\frac{eB}{m^2}\right)^2+\frac{4}{45}\left(\frac{eB}{m^2}\right)^4-\frac{1312}{3465}\left(\frac{eB}{m^2}\right)^6+\frac{58048}{20475}\left(\frac{eB}{m^2}\right)^8+...\right)+\\
&\left.\qquad +z_2^2\left(\frac{1}{15}-\frac{1}{35}\left(\frac{eB}{m^2}\right)^2+\frac{92}{1575}\left(\frac{eB}{m^2}\right)^4-\frac{304}{1155}\left(\frac{eB}{m^2}\right)^6+\frac{461632}{225225}\left(\frac{eB}{m^2}\right)^8+...\right)\right] && (27)
\end{aligned}$$

$$\kappa_2^{(1)} = \frac{e^2}{4\pi^2 m^2}\left[\frac{z_1^2}{15}\left(1+\frac{2}{3}\left(\frac{eB}{m^2}\right)^2-\frac{8}{15}\left(\frac{eB}{m^2}\right)^4+\frac{32}{21}\left(\frac{eB}{m^2}\right)^6-\frac{128}{15}\left(\frac{eB}{m^2}\right)^8+...\right)+\right.$$

$$+z_1z_2\left(\frac{2}{15}+\frac{1}{63}\left(\frac{eB}{m^2}\right)^2-\frac{152}{4725}\left(\frac{eB}{m^2}\right)^4+\frac{1448}{10395}\left(\frac{eB}{m^2}\right)^6-\frac{696704}{675675}\left(\frac{eB}{m^2}\right)^8+...\right)+$$
$$+z_2^2\left(\frac{1}{15}-\frac{1}{35}\left(\frac{eB}{m^2}\right)^2+\frac{92}{1575}\left(\frac{eB}{m^2}\right)^4-\frac{304}{1155}\left(\frac{eB}{m^2}\right)^6+\frac{461632}{225225}\left(\frac{eB}{m^2}\right)^8+...\right)\Bigg] \tag{28}$$

$$\begin{aligned}\kappa_3^{(1)} = \frac{e^2}{4\pi^2m^2}\Bigg[&z_1^2\left(\frac{1}{15}-\frac{2}{105}\left(\frac{eB}{m^2}\right)^2+\frac{16}{525}\left(\frac{eB}{m^2}\right)^4-\frac{80}{693}\left(\frac{eB}{m^2}\right)^6+\frac{176896}{225225}\left(\frac{eB}{m^2}\right)^8+...\right)+\\ &+z_1z_2\left(\frac{2}{15}-\frac{26}{315}\left(\frac{eB}{m^2}\right)^2+\frac{1012}{4725}\left(\frac{eB}{m^2}\right)^4-\frac{8}{7}\left(\frac{eB}{m^2}\right)^6+\frac{6825152}{675675}\left(\frac{eB}{m^2}\right)^8+...\right)+\\ &+z_2^2\left(\frac{1}{15}-\frac{4}{63}\left(\frac{eB}{m^2}\right)^2+\frac{16}{75}\left(\frac{eB}{m^2}\right)^4-\frac{320}{231}\left(\frac{eB}{m^2}\right)^6+\frac{176896}{12285}\left(\frac{eB}{m^2}\right)^8+...\right)\Bigg]\end{aligned} \tag{29}$$

Note that in the zero field limit $B=0$, terms with the factor $(z_1+z_2)^2$ remain as non-zero as it is expected in quantum electrodynamics [3]

For the particular case $\mathbf{k}=\mathbf{k}_\perp$ by taking the first terms of the expansion in powers of B^2 in (25),(26) we have

$$\begin{aligned}\kappa_2^{(0)} &= \frac{e^4B^2}{36\pi^2m^4}(\omega^2+\frac{2}{5}k_\perp^2),\\ \kappa_3^{(0)} &= \frac{e^4B^2}{36\pi^2m^4}(-\frac{2}{5}\omega^2+\frac{6}{5}k_\perp^2)\end{aligned} \tag{30}$$

For the light cone $z_1+z_2=0$, the expressions (30) agree with those for the refraction indexes obtained earlier by Adler [4] and Dittrich [5] by starting from the Euler-Heisenberg Lagrangian and differentiating with regard to the photon fields.

II. PHOTON ANOMALOUS MAGNETIC MOMENT

We differentiate with regard to B the dispersion equation $z_1+z_2=\kappa_i$ and get

$$\begin{aligned}\frac{\partial z_1}{\partial B} &= \frac{\partial \kappa_i}{\partial B}\\ &= \frac{e^2}{2\pi^2B}\int_0^\infty dt\int_{-1}^1 d\eta e^{-\frac{m^2}{eB}t}\left[e^{\zeta\frac{\rho_i}{\sinh t}}\left(\frac{m^2}{eB}t-\zeta\right)+\frac{m^2}{eB}(z_1+z_2)\frac{1-\eta^2}{8}\right]\\ &\qquad +\frac{\partial z_1}{\partial B}\frac{e^2}{2\pi^2}\int_0^\infty dt\int_{-1}^1 d\eta e^{-\frac{m^2}{eB}t}\left[e^{\zeta}\frac{1}{\sinh t}\left(\frac{\partial \rho_i}{\partial z_1}-\frac{\rho_i}{eB}\frac{1-\eta^2}{4}t\right)+\frac{1-\eta^2}{8t}\right].\end{aligned} \tag{31}$$

and using $\frac{\partial z_1}{\partial B}=-2\omega\frac{\partial \omega}{\partial B}$, we obtain an expression for the photon anomalous magnetic moment (see Fig. 1)

$$\mu_\gamma = -\frac{\partial \omega}{\partial B} \tag{32}$$

$$= \frac{1}{2\omega B}\frac{\frac{e^2}{2\pi^2B}\int_0^\infty dt\int_{-1}^1 d\eta e^{-\frac{m^2}{eB}t}\left[e^{\zeta\frac{\rho_i}{\sinh t}}\left(\frac{m^2}{eB}t-\zeta\right)+\frac{m^2}{eB}(z_1+z_2)\frac{1-\eta^2}{8}\right]}{1-\frac{e^2}{2\pi^2}\int_0^\infty dt\int_{-1}^1 d\eta e^{-\frac{m^2}{eB}t}\left[e^{\zeta}\frac{1}{\sinh t}\left(\frac{\partial \rho_i}{\partial z_1}-\frac{\rho_i}{eB}\frac{1-\eta^2}{4}t\right)+\frac{1-\eta^2}{8t}\right]}. \tag{33}$$

A. Small frequencies limit $z_1, z_2 << m^2$

For small frequencies $m^2 >> z_1, z_2$ we can take only the first term $\kappa_i^{(0)}$ in the series expansion (4). In this section we are interested in computing $\mu_\gamma^{2,3}$ (perpendicular propagation). The solutions of the dispersion equations in this

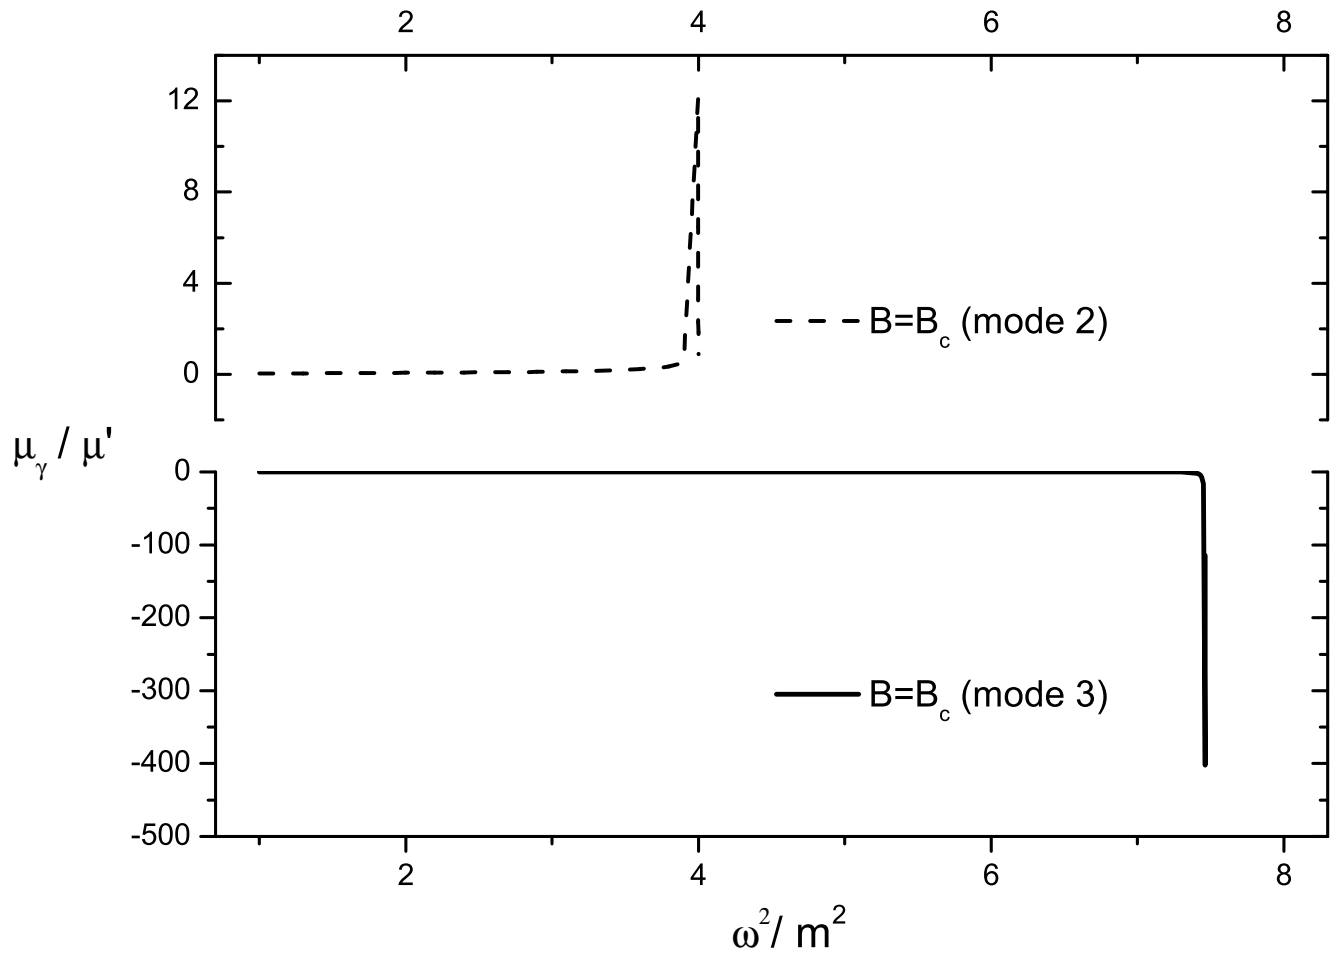

FIG. 1: Photon magnetic moment curve drawn with regard to squared frequency, for the second and the third modes showing a peak near the first and the second threshold, respectively.

limit $z_1 + z_2 = \kappa_{2,3}^{(0)}$ for the second and the third modes, respectively, are

$$\begin{aligned} z_1 &= -z_2 \frac{1 - \frac{e^2}{2\pi^2}\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{22}}{1 - \frac{e^2}{2\pi^2}\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{21}}, & (34) \\ z_1 &= -z_2 \frac{1 - \frac{e^2}{2\pi^2}\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{32}}{1 - \frac{e^2}{2\pi^2}\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{31}} & (35) \end{aligned}$$

From (34), (35), after a straightforward calculation we get $\mu_\gamma^{2,3} = -\frac{\partial\omega}{\partial B} = \frac{1}{2\omega}\frac{\partial\kappa_i^{(0)}}{\partial B}$

$$\begin{aligned} \mu_\gamma^2 &= z_2 \frac{e^2 B_c}{4\pi^2 \omega B} \frac{\left(1 - \frac{e^2}{2\pi^2}\int_0^\infty dte^{-\frac{m^2}{eB}\tau} g_{21}\right)\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{22} t - \left(1 - \frac{e^2}{2\pi^2}\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{22}\right)\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{21} t}{\left(1 - \frac{e^2}{2\pi^2}\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{21}\right)^2}, & (36) \\ \mu_\gamma^3 &= z_2 \frac{e^2 B_c}{4\pi^2 \omega B} \frac{\left(1 - \frac{e^2}{2\pi^2}\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{31}\right)\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{32} t - \left(1 - \frac{e^2}{2\pi^2}\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{32}\right)\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{31} t}{\left(1 - \frac{e^2}{2\pi^2}\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{31}\right)^2}. & (37) \end{aligned}$$

It is easy to see that $\mu_\gamma^{2,3} > 0$ due to the following relations:

$$\begin{gathered} \frac{e^2}{2\pi^2} << 1, \int_0^\infty dte^{-\frac{m^2}{eB}t} g_{21} t < 0, \int_0^\infty dte^{-\frac{m^2}{eB}t} g_{22} t, \int_0^\infty dte^{-\frac{m^2}{eB}t} g_{31} t, \int_0^\infty dte^{-\frac{m^2}{eB}t} g_{32} t > 0, \\ \left|\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{21} t\right| > \left|\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{32} t\right| > \left|\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{22} t\right| = \left|\int_0^\infty dte^{-\frac{m^2}{eB}t} g_{31} t\right| \end{gathered}$$

III. ACKNOWLEDGEMENTS

The authors thank A.E.Shabad for useful comments and S.Villalba for a discussion. They thank also OEA-ICTP for support under Net-35.

---

[1] H. Perez Rojas and E. Rodriguez Querts, hep-ph/0808.2955 v2 (2008)
[2] A.E. Shabad, Ann. Phys. **90** 166, 1975
[3] E.S.Fradkin, Quantum Field Theory and Hydrodynamics,Consultants Bureau, (1967)
[4] S. Adler, Ann. Phys.**67**, 599 (1971)
[5] W. Dittrich, H. Gies, Phys. Rev. **D58**,025004 (1998)